
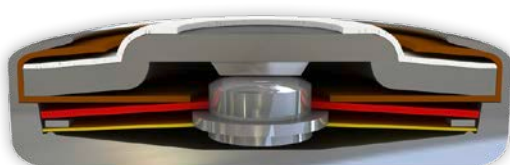


DATASHEET

Thermal Protector L02

Type series 02

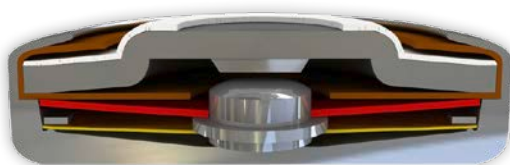

Construction and function

The switchgear of type series 02 is fixed in a positive lock and is self-aligning between the floor of a conductive housing (1) and a contact cap which is made of steel (2) and insulated from it, plus an integrated stationary silver contact (6) which closes the housing like a button cell. By means of a throw force a bimetallic disc (5) pushes the movable contact (4) that sticks out in the middle of it onto its circumferential collar (6) against the spring snap-in disc (3) that is also surrounding the contact (4). Due to the higher throw force of the bimetallic disc (5) the switch contact remains open against the mechanical resistance of the spring snap-in disc (3) before reaching the rated switching temperature. As such, the contact also remains open as long as the bimetallic disc – only reacting to the ambient temperature – continually works and its shape changes. The bimetallic disc (5) only snaps into its inverted position when the rated switching temperature is reached and the contact is closed by the abruptly released pressure of the spring snap-in disc (3). The spring snap-in disc (3) is now a transfer element for electric current and as such, it enables the bimetallic disc (5) to continue to work on a continuous basis. When the reset temperature is reached, the bimetallic disc snaps back into its start position and the contact is opened again.




Features:

Specially flat design	to fit closely built-up circuits
Quick response sensitivity	Featured by small protector mass and the metal-housing
Excellent long term performance	due to instantaneous switching, fine silver contacts, constant contact resistance and to electrically as well as mechanically unstressed bimetallic disc, reproducible switching temperature values
Instantaneous switching	always with the same contact pressure up to reset point; resulting in low contact stress
Very short bounce times	< 1 ms
Temperature resistance	by use of high temperature resistant materials and components

L02

Type: Normally open; resets automatically; with connector cables; with epoxy; fully insulated in a screw on housing



Housing height h	from 7,0 mm
Diameter d	10,0 mm
Thread/Length	M4 x 5,0 mm
Width across flats/Max. torque	10,0 mm / 2 Nm

Nominal switching temperature (NST) in 5 °C increments	60 °C - 200 °C
Tolerance (standard)	±5 K
Reverse Switch Temperature (defined RST is possible at the customer's request)	UL $\geq 35^{\circ}\text{C}$ ($\leq 80^{\circ}\text{C}$ NST) -35 K ± 15 K ($\geq 85^{\circ}\text{C} \leq 180^{\circ}\text{C}$ NST) -65 K ± 15 K ($\geq 185^{\circ}\text{C} \leq 200^{\circ}\text{C}$ NST) VDE $\geq 35^{\circ}\text{C}$
Housing height	from 7,0 mm
Installation height	13,0 mm
Diameter	10,0 mm
Thread/Length	M4 x 5,0 mm
Width across flats/Max. torque	10,0 mm / 2 Nm
Resistance to impregnation *	suitable
Suitable for installation in protection class	I + II
Pressure resistance to the switch housing *	450 N
Standard connection	Lead wire 0,25 mm ² / AWG22
Available approvals (please state)	IEC; ENEC; VDE; UL; CSA; CQC
Operating voltage range AC	up until 500 V AC
Rated voltage AC	250 V (VDE) 277 V (UL)
Rated current AC cos φ = 1.0/cycles	2,5 A / 10.000
Rated current AC cos φ = 0.6/cycles	1,6 A / 10.000
High voltage resistance	2,0 kV
Total bounce time	< 1 ms
Contact resistance (according to MIL-STD. R5757)	$\leq 50\text{ m}\Omega$
Vibration resistance at 10 ... 60 Hz	100 m/s ²

Ordering example:

L02 - 125.05 0100 / 0100

Type / version _____

NST [°C] _____

Tolerance [K] _____

Lead lengths [mm] _____ L₁ L₂

Marking example:

Trade mark  thermik

Type / version _____ L02

NST [°C] . Tolerance [K] — 125.05

More varieties of the type series 02:

- C02 – with connector cables; with or without epoxy; without insulation
- S02 – with connector cables; with or without epoxy; insulation: Mylar®-Nomex®
- N02 – with a connection wire; partially insulated in a plastic cap
- C02 Pin – with pins; with epoxy; without insulation

www.thermik.de/data/C02
www.thermik.de/data/S02
www.thermik.de/data/N02
www.thermik.de/data/C02-Pin

*In accordance with the Thermik test. Specifications relating to part applications (on the part of the buyer) which deviate from our standards are not checked for their capacity to support an application and/or conformity with standards. The responsibility for testing the suitability of Thermik products for such applications rests upon the user. • Slight deviations are possible in terms of dimensions/ values, depending on the embodiment of the product. • We reserve the right to make technical changes in the course of further development. • Details concerning certain data, measurement methods, applications, approvals, etc. can be supplied upon request.

Tanpoquier Electrical Equipment

Authorized Distributor

Tel : 400-0506-811

Website : www.tpqe.com

Email : support@tpqe.com

More products :

PCA1.2003.1EG 10	S01.085.05.0050.0050	ZCY15
PCA1.2005.1EG	S01.105.05.0100.0100	XCRZ03
PCA1.1505.1EG 10	S01.140.05.0050.0050	ZCE01
PCA1.2003.10EG 10	S01.160.05.0050.0050	ZCKY11C
PCA1.2005.1S	CP1.140.05.0100.0100	ZCKY31
PCA1.2003.1EG 10	L01.085.05.0050.0050	ZCKY422460
PCS1.1503.1	S02.150.05.0050.0050	ZCY22
PCS1.1302.1M	S06.150.05.0100.0100	ZCE10
PCA1.2004.1EG 10	CK1.060.05.0050.0050	ZCY46
PCS1.1302.5M	S05.175.05.0100.0100	ZCKD31
PCS1.1302.10M	C01.240.05.0239.0114	ZCKE09
PCA1.2005.10S	S01.115.05.0115.0115	ZCMD21L2
PCA1.2005.10M	S01.165.05.0050.0050	